



KRATEx | PC

Zone 1, 21
Zone 2, 22

With a wide range of options for ATEX projects

Ex II 2G Ex db IIC T6 Gb

Ex II 2D Ex tb IIIC T85°C Db

ATEX certificate No: INERIS 20ATEX0006X-01

IECEX certificate No: IECEx INE 20.0005X-1



5 YEARS
warranty



Benefits

- Suitable for environments up to 50°C, even outdoors.
- Compliant with gas groups IIA, IIB, IIC, due to its reduced MESH, making it perfect for almost all ATEX environments.
- DALI dimmable to optimize the use of light and save energy.
- Intelligent wireless control available.

Characteristics

IP 66 | IK 10 | Frequency 0-50/60Hz | Rated voltage 220-240V | NON-SELV |

Mechanical characteristics

Profile	UV resistant polycarbonate 5 mm thickness
End caps	Aluminium alloy, yellow RAL 1003
Gasket	Nitrile Butadiene Rubber (NBR)
Gear tray	White laquered steel plate
Cable entry	2 entries of 3/4 NPT for cable gland (not included)
Fixing clips	See Accessories

Functional characteristics


Lifetime	L80B50 50,000 hours at 25°C
Guarantee	5 years
Fire protection	Flammability (UL94): V2 Glow wire test (EN 60695-2-11): 850°

Electrical characteristics

Connection	3/5 pole push wire terminal block
THD	< 10% full load

Photometrical characteristics

SDCM	< 3
------	-----



Compliance





KRATEx | PC

Description

FAMILY	LENGHT (mm)	LUMINOUS FLUX (lm)	CRI	LIGHT COLOUR (K)	DRIVER	PROFILE	THROUGH WIRING	EMERGENCY KIT ¹	END CAPS COLOUR
> KRATEx HE > KRATEx NS HE: non-permanent emergency versions	> 0.3/300 > 0.6/600 > 1200	> 20: ~ 2500 > 40: ~ 4750 > 100: ~ 11000	> 8: >80	> 40: 4000	> ET: non-dimmable > ETDD: DALI > ETDD CS: Casambi dimmable	> PC: polycarbonate	> 3x2.5mm ²	> EB1: 1 hours > EB3: 3 hours > EB1.: 1 hour + autotest > EB3.: 3 hours + autotest	>_ yellow RAL 1003

Special options under request

Ask our Sales Team for more details

> 65: 6500K

> NiMH
> LFP

> 7035: grey RAL 7035

¹ With NiCd battery

Operational data

Description	Order number	Luminous flux (lm)	Power (W)	Efficiency (lm/W)	Emergency luminous flux (lm)	Colour temperature (K)	CRI	Temperature range
KRATEx HE 300 13-840 ET PC	10287649	1250	11	115	-	4000	> 80	-20°C +50°C
KRATEx HE 300 22-840 ET PC	10287651	2150	20	110	-	4000	> 80	-20°C +50°C
KRATEx HE 600 25-840 ET PC	10169101	2500	20	125	-	4000	> 80	-20°C +50°C
KRATEx HE 600 25-840 ET PC 3x2.5	10203309	2500	20	125	-	4000	> 80	-20°C +50°C
KRATEx HE 600 25-840 ETDD PC	10203310	2500	20	125	-	4000	> 80	-20°C +50°C
KRATEx HE 600 25-840 ETDD PC CS	10203311	2500	20	125	-	4000	> 80	-20°C +50°C
KRATEx HE 1200 48-840 ET PC	10169107	4750	40	120	-	4000	> 80	-20°C +50°C
KRATEx HE 1200 48-840 ET PC 3x2.5	10203316	4750	40	120	-	4000	> 80	-20°C +50°C
KRATEx HE 1200 48-840 ETDD PC	10203317	4750	40	120	-	4000	> 80	-20°C +50°C
KRATEx HE 1200 48-840 ETDD PC CS	10203318	4750	40	120	-	4000	> 80	-20°C +50°C
KRATEx HE 1200 110-840 ET PC	10203335	11000	80	140	-	4000	> 80	-20°C +50°C
KRATEx HE 1200 110-840 ETDD PC	10203336	11000	80	140	-	4000	> 80	-20°C +50°C
EMERGENCY KIT								
KRATEx HE 300 22-840 ET PC EB1. ²	10287636	2150	24	90	750	4000	> 80	0°C +55°C
KRATEx HE 600 25-840 ET PC EB1. ²	10203326	2500	24	100	750	4000	> 80	0°C +55°C
KRATEx HE 600 25-840 ET PC EB3. ²	10203327	2500	30	83	750	4000	> 80	0°C +55°C
KRATEx HE 600 25-840 ETDD PC EB1. ²	10203314	2500	24	104	750	4000	> 80	0°C +55°C
KRATEx HE 600 25-840 ETDD PC EB3. ²	10203315	2500	30	83	750	4000	> 80	0°C +55°C
KRATEx HE 1200 48-840 ET PC EB1. ²	10169109	4750	40	118	750	4000	> 80	0°C +55°C
KRATEx HE 1200 48-840 ET PC EB3. ²	10169111	4750	45	110	750	4000	> 80	0°C +55°C
KRATEx HE 1200 48-840 ETDD PC EB1. ²	10203333	4750	40	120	750	4000	> 80	0°C +55°C
KRATEx HE 1200 48-840 ETDD PC EB3. ²	10203334	4750	45	110	750	4000	> 80	0°C +55°C
KRATEx HE 1200 110-840 ET PC EB3. ²	10381502	11000	80	137	750	4000	> 80	0°C +50°C
NON PERMANENT EMERGENCY								
KRATEx NS HE 0.3 4-840 ET PC EB3.	10287633	-	5	-	350	4000	> 80	0°C +50°C
KRATEx NS HE 0.3 8-840 ET PC EB3.	10287635	-	5	-	750	4000	> 80	0°C +50°C
KRATEx NS HE 0.6 8-840 ET PC EB1.	10169103	-	5	-	750	4000	> 80	0°C +50°C
KRATEx NS HE 0.6 8-840 ET PC EB3.	10169105	-	5	-	750	4000	> 80	0°C +50°C

² In emergency versions maximum power consumption increases in 4W during battery charging, which is approximately 5% of the time that luminaire is on. The rest of the time power consumption is as indicated.

* Emergency luminaires have a special voltage and frequency range because they do not admit Vdc, therefore it is: 220-240V 50-60Hz.

* The luminaires with Casambi CS module, do not admit Vdc or 60Hz, therefore it is: 220-240V 50Hz.




KRATEx | PC

Dimensions and logistics

Description	X	Xm	Y	Z					
	mm	mm	mm	mm	L x W x H mm	Pcs./ Box	Box ²	Groupage Pcs./Euro pallet	Double pallet Pcs./Euro pallet
KRATEx HE 300/0.3...	485	375	157	173	510 x 170 x 220	1	4.4	48	32 + 32
KRATEx HE 600/0.6...	750	640	157	173	780 x 170 x 220	1	5.9	48	32 + 32
KRATEx HE 1200...	1360	1250	157	173	1390 x 240 x 180	1	11.2	24	16 + 16

² Weight in EB versions: +0.6KG and in 3x2.5 versions: +0.1KG
Please check with our Back Office to confirm logistic data

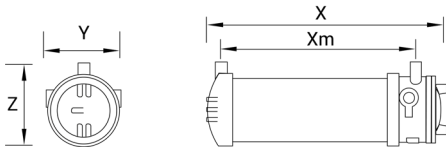

Accessories

10078101	Eye bolts, 2 units
10078102	Fixing omegas, 2 units
10078104	Brass double-sealed EX cable gland seals for armoured cable 3/4 NPT, 1 unit



10078101



10078102



10078104