

PEM T5

Versatile luminaire for T5 tubes



FARM	WAREHOUSE	FACTORY	WORKSHOP	CORRIDOR	INDOOR	OUTDOOR UNDER SHELTER	CEILING MOUNTING	WALL MOUNTING	3 YEARS warranty	+40°C -5°C
------	-----------	---------	----------	----------	--------	-----------------------	------------------	---------------	------------------	---------------

Benefits

- Classic design for a wide range of **general and industrial applications**.
- Resistant to chemical agents and reliable for farming.

Characteristics

IP 65	IK 03	Frequency 50/60Hz	Rated voltage 220-240V		
-------	-------	-------------------	------------------------	--	--

Mechanical characteristics

Housing	Compressed fibreglass reinforced polyester (GRP) Grey RAL 7035
Diffuser	Injected PMMA with UV protection
Closing clips	Polyamide 6
Gasket	Polyurethane
Gear tray	White lacquered steel plate
Cable entry	Grommet
Lamp holder	G13

Functional characteristics

Guarantee	3 years
Fire protection	Flammability (UL94): HB Glow wire test (EN 60695-2-11): 650°C

Compliance


Electrical characteristics

Connection	3-pole connection strip
------------	-------------------------

Photometrical characteristics

1 TUBE

2 TUBES

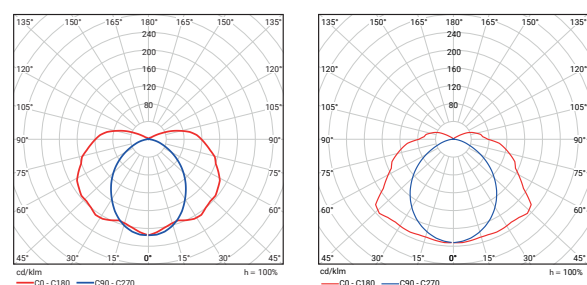

PEM T5

Description

FAMILY / MODEL	TUBE TYPE	ELECTRICAL VERSION
> PEM	> 114: 1x14W > 214: 2x14W > 124: 1x24W > 224: 2x24W > 128: 1x28W > 228: 2x28W > 135: 1x35W > 235: 2x35W > 149: 1x49W > 249: 2x49W > 154: 1x54W > 254: 2x54W > 180: 1x80W	> E: electronic (high frequency), non-dimmable ballast

Special options under request

Operational data

Description	Order number	X	Xm	Y	Z	L x W x H mm	Pcs./ Box	Box KG	Groupage Pcs./Euro pallet	Double pallet Pcs./Euro pallet
		mm	mm	mm	mm					
PEM 114 E	10094931	666	230	100	108	666 x 100 x 108	1	1.0	210	168 + 168
PEM 124 E	10094932	666	230	100	108	666 x 100 x 108	1	1.0	210	168 + 168
PEM 128 E	10094933	1275	840	100	108	1275 x 100 x 108	1	1.8	105	84 + 84
PEM 135 E	10051623	1575	1140	100	108	1575 x 100 x 108	1	2.1	105	84 + 84
PEM 149 E	10020496	1575	1140	100	108	1575 x 100 x 108	1	2.1	105	84 + 84
PEM 154 E	10094934	1275	840	100	108	1275 x 100 x 108	1	1.8	105	84 + 84
PEM 180 E	10015686	1575	1140	100	108	1575 x 100 x 108	1	2.1	105	84 + 84
PEM 214 E	10015096	666	230	170	108	666 x 170 x 108	1	1.4	120	120 + 120
PEM 224 E	10015097	666	230	170	108	666 x 170 x 108	1	1.4	120	120 + 120
PEM 228 E	10015098	1275	840	170	108	1275 x 170 x 108	1	2.1	60	60 + 60
PEM 235 E	10015099	1575	1140	170	108	1575 x 170 x 108	1	2.6	60	60 + 60
PEM 249 E	10015100	1575	1140	170	108	1575 x 170 x 108	1	2.6	60	60 + 60
PEM 254 E	10015101	1275	840	170	108	1275 x 170 x 108	1	2.1	60	60 + 60

Please check with our Back Office to confirm logistic data

