

PEP T8

Weatherproof luminaire for T8 tubes



									3 YEARS warranty	
--	--	--	--	--	--	--	--	--	----------------------------	--

Benefits

- Classic design for a wide range of general and industrial applications.
- Great impact resistance.

Characteristics

IP 65	IK 07	Frequency 50/60Hz	Rated voltage 220-240V		
-------	-------	----------------------	---------------------------	--	--

Mechanical characteristics

Housing	Compressed fibreglass reinforced polyester (GRP) Grey RAL 7035
Diffuser	Injected polycarbonate with UV protection
Closing clips	Polyamide 6
Gasket	Polyurethane
Gear tray	White lacquered steel plate
Cable entry	Grommet
Lamp holder	G13

Functional characteristics

Guarantee	3 years
Fire protection	GRP: Flammability (UL94): HB Glow wire test (EN 60695-2-11): 650°C PC: Flammability (UL94): V2 Glow wire test (EN 60695-2-11): 850°C

Compliance


Electrical characteristics

Connection	3-pole connection strip
------------	-------------------------

Photometrical characteristics

1 TUBE

2 TUBES

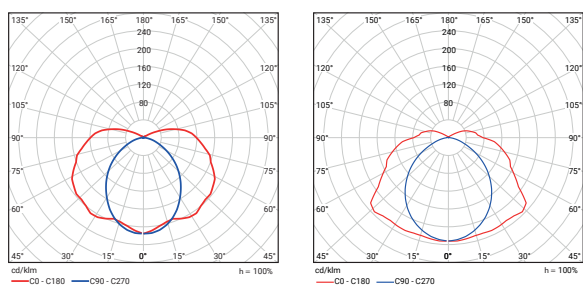

PEP T8

Description

FAMILY / MODEL	TUBE TYPE	ELECTRICAL VERSION
> PEP	> 118: 1x18W > 136: 1x36W > 158: 1x58W > 218: 2x18W > 236: 2x36W > 258: 2x58W	> E: electronic (high frequency), non-dimmable ballast
Special options under request		

Operational data

Description	Order number	X	Xm	Y	Z					
		mm	mm	mm	mm	L x W x H mm	Pcs./ Box	Box	Groupage Pcs./Euro pallet	Double pallet Pcs./Euro pallet
PEP 118 E	10012203	666	230	100	108	666 x 100 x 108	1	1.0	210	168 + 168
PEP 136 E	10007406	1275	840	100	108	1275 x 100 x 108	1	1.8	105	84 + 84
PEP 158 E	10012300	1575	1140	100	108	1575 x 100 x 108	1	2.1	105	84 + 84
PEP 218 E	10012362	666	230	170	108	666 x 170 x 108	1	1.4	120	120 + 120
PEP 236 E	10007413	1275	840	170	108	1275 x 170 x 108	1	2.1	60	60 + 60
PEP 258 E	10012462	1575	1140	170	108	1575 x 170 x 108	1	2.6	60	60 + 60

Please check with our Back Office to confirm logistic data

